



TRANSI-TRAY CABINETS

Heavy-Duty Non-Insulated

Models: CA63-ES32 CA63-ES49 CA71-ES38 CA71-ES58

Design Features

- 30" long stainless steel gravity latch with padlock position
- Door can be secured in closed or fully open (270°) position
- Pan support positions available on 1 1/2" or 1" spacing
- Front mounted tie bar reinforces cabinet and functions as a handle when door is latched in open position
- Three stainless steel hinges
- Card holder mounted above door for easy visibility

Quality Construction

- Aluminum construction
- Heavy-duty 14 ga. stainless steel 270° swing hinges
- Interlocking extruded panels form easy-to-clean sides
- Front and rear extruded tie bars for added strength
- One piece extruded aluminum side frames
- Extruded header bars (front & rear)
- Cabinet top is reinforced with extruded aluminum transport bumper
- Heavy-duty plate type casters, all swivel, with 5" polyurethane wheels; front two casters with brakes



Options & Accessories

- Perimeter bumper
- Corner bumpers
- Push/pull handles
- Door hinging (left)

Warranty & Certifications

Parts and Service Warranty

- Protected by BevLes 2 year parts and 1 year service warranty

Certified by the following:




Mailing: 729 Third Ave., Dallas, TX 75226 • Shipping: 1938 Wyott Dr., Cheyenne, WY 82007
(800) 441-1601 • Fax: (214) 565-0976 • www.bevles.com • sales@bevles.com



TRANSI-TRAY CABINETS

Heavy-Duty Non-Insulated

Models: CA63-ES32 CA63-ES49 CA71-ES38 CA71-ES58

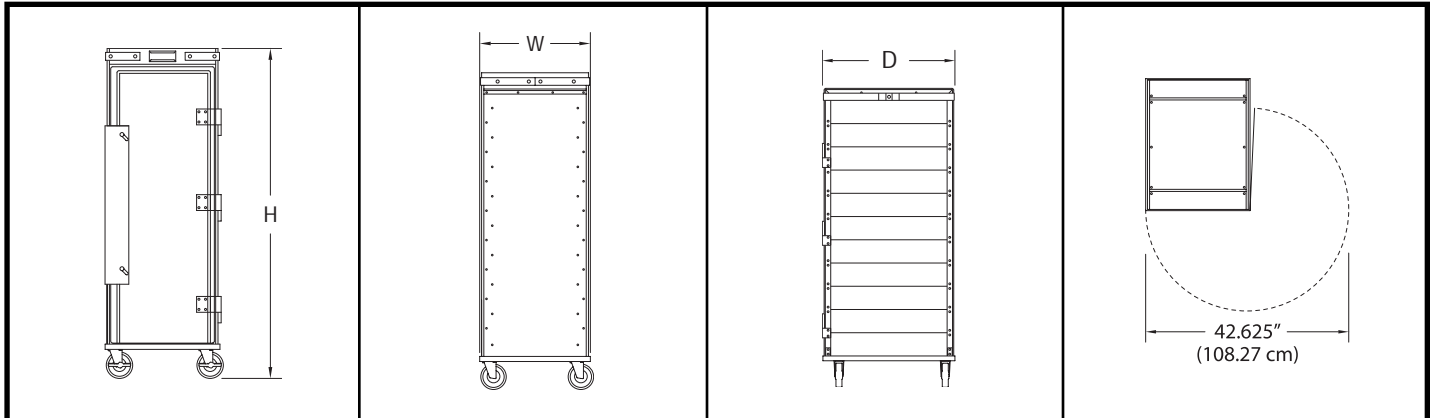

Model	Capacity			Dimensions			Ship Wt.	Act. Wt.
	18x26	12x20	SPC'G*	H	W	D		
CA63-ES32	32	---	1½"	62.5" (158.8 cm)	22" (55.9 cm)	27.5" (69.9 cm)	115 lbs (52.2 kg)	92 lbs (41.7 kg)
CA63-ES49	49	---	1"	62.5" (158.8 cm)	22" (55.9 cm)	27.5" (69.9 cm)	121 lbs (54.9 kg)	99 lbs (44.9 kg)
CA71-ES38	38	---	1½"	71.5" (181.6 cm)	22" (55.9 cm)	27.5" (69.9 cm)	140 lbs (63.5 kg)	118 lbs (53.5 kg)
CA71-ES58	58	---	1"	71.5" (181.6 cm)	22" (55.9 cm)	27.5" (69.9 cm)	148 lbs (67.1 kg)	129 lbs (58.5 kg)

Construction:

- **Body:** .063 aluminum
- **Door:** .125 aluminum
- **Door Latch and Hinges:** 30" long 18 ga. stainless steel gravity latch; 3 heavy-duty 14 ga. stainless steel hinges with 270° swing
- **Base:** .190 aluminum with welded corners
- **Side Frame:** One Piece, heavy-duty extruded frame, custom designed for maximum strength and durability
- **Header Bar:** Front and rear custom extruded header bars securely stabilize side frames to top and back of cabinet
- **Tie Bars:** Heavy-duty extruded tie bar (1/2"x3/4"x18 1/4") attached horizontally at front and rear of cabinet – front tie bar may be utilized as a handle when door is secured in 270° open position
- **Card Holder:** 2"x5" aluminum card holder riveted to front header bar (above door)
- **Transport Bumper:** Extruded aluminum (1 1/2"x3/16") bolted at back, sides and front of cabinet top

Pan Support Assembly:

- **Pan Supports:** Aluminum extrusion .075" thick with interlocking "V" seam to provide sanitary joint – 9/16" wide ledges on 1 1/2" or 1" centers

Casters:

- Heavy-duty plate type casters, all swivel, with 5" polyurethane wheels; front two casters with brakes

Shipping:

- Freight Class: 125
- FOB: Cheyenne, WY 82007

* Note: Modifications involving casters or legs may affect height of equipment. Specifications subject to change without notice.



Mailing: 729 Third Ave., Dallas, TX 75226 • Shipping: 1938 Wyatt Dr., Cheyenne, WY 82007
 (800) 441-1601 • Fax: (214) 565-0976 • www.bevles.com • sales@bevles.com

4/20/05
 #B401