



ROAST & HOLD OVENS

Tender Touch Classic Full-Size 208/240V

Models: CS72-TC15-HV+ CS72-TC16-HV CS72-TCMP11-HV+ CS72-TCMP12-HV

Design Features

- User-friendly solid state controls with digital display
- Standard Pass-Thru design speeds cleaning by eliminating hard-to-reach corners – makes loading and unloading quick and easy
- Power Loss Alarm informs operator of power failure during unattended roasting or holding that exceeds 3 minutes
- Roast and hold temperature range of 145°F - 245°F (63°C - 118°C)
- Timer range allows a maximum roasting time of 16 hours
- Heavy-duty Sealed Power Switch – protects from water, grease and dirt
- Top mounted convection heat and humidity system with high wattage heating element maintains even temperatures throughout the oven ensuring quick preheating and rapid recovery

Quality Construction

- All stainless steel construction provides years of dependable use in all types of environment
- Top mounted heat and humidity system is easily removable for cleaning and service
- High Quality Lexan® Front Panel Decal allows for easy cleaning
- Door features include magnetic gasket to prevent heat loss, heavy-duty hinges and positive-closing latch



Options & Accessories

- Corner bumpers
- Perimeter bumper
- Door hinging
- Chrome electro-plated wire roasting racks
- 4" or 5" casters

Warranty & Certifications

Parts and Service Warranty

- Protected by BevLes 2 year parts and 1 year service warranty

Certified by the following:






ROAST & HOLD OVENS

Tender Touch Classic Full-Size 208/240V

Models: CS72-TC15-HV+ CS72-TC16-HV CS72-TCMP11-HV+ CS72-TCMP12-HV

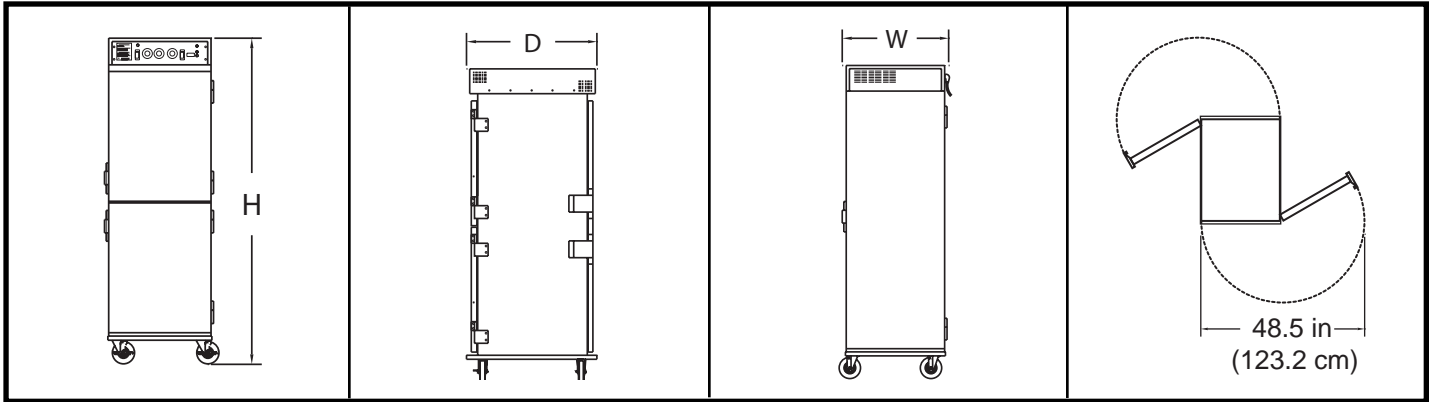

Model	Capacity			Dimensions			Ship Wt.	Act. Wt.
	18x26	12x20	SPC'G	H	W	D		
Standard Width								
CS72-TC15-HV+	15	---	3/4"	72" (182.8 cm)	25" (63.5 cm)	31" (78.7 cm)	340 lbs (154.2 kg)	325 lbs (147.4 kg)
CS72-TC16-HV	16	---	3/4"	72" (182.8 cm)	25" (63.5 cm)	31" (78.7 cm)	340 lbs (154.2 kg)	325 lbs (147.4 kg)
Universal Width								
CS72-TCMP11-HV+	11	22	3/4"	72" (182.8 cm)	29" (73.7 cm)	31" (78.7 cm)	340 lbs (154.2 kg)	325 lbs (147.4 kg)
CS72-TCMP12-HV	12	24	3/4"	72" (182.8 cm)	29" (73.7 cm)	31" (78.7 cm)	340 lbs (154.2 kg)	325 lbs (147.4 kg)

Electrical	Voltage	Watts	Amps	Electric Service	Phase	Hertz	Clearances
Standard	208/120	4600	23	30A Dedicated Circuit	1 w/neutral	50/60	Sides, Back = 0"; Top = 3"
Optional	240/120	5240	23	30A Dedicated Circuit	1 w/neutral	50/60	Sides, Back = 0"; Top = 3"

(+) designates models equipped with humidity system

Construction:

- **Exterior Body:** 20 ga. 304 #3 stainless steel
- **Interior Body:** 20 ga. 304-2B stainless steel
- **Exterior Door:** 20 ga. 304 #3 stainless steel
- **Interior Door:** 22 ga. auto-brite stainless steel
- **Base:** 14 ga. 304-2B stainless steel
- **Door Gasket(s):** Magnetic, NSF approved Santoprene
- **Insulation:** Fully insulated sides, base, top and door(s) with 1.5" fiberglass insulation (5.7 R-Factor and minimum rating of .26K per inch)

Heating Modules & Controls:

- **Heating Module:** Removable for maintenance and cleaning
- **Humidity System:** Models CS72-TC15-HV+ & CS72-TCMP11-HV+ are equipped with a 9 quart (8.5 liter) stainless steel water reservoir with adjustable baffles.
- **Fan Blower:** 1-piece modular drop-in design blower assembly

Electrical:

- **Switch:** Custom sealed heavy-duty 20 Amp
- **Cord:** 208V or 240V models provided with 8' cord only

Casters:

- Heavy-duty plate type casters, all swivel, with 5" hard neoprene wheels; front two casters with brakes

Pan Support Assembly:

- CS72-TC15-HV+ & CS72-TC16-HV models have heavy-duty extruded aluminum panels with pan supports on 1 1/2" centers (pans are lip supported)
- CS72-TCMP11-HV+ & CS72-TCMP12-HV models have 22 ga. stainless steel (air duct) panels with heavy-duty chrome electro-plated wire pan supports adjustable on 1 5/8" centers (pans are bottom supported)

Shipping:

- Freight Class: 85
- FOB: Erie, PA 16511

* Note: Modifications involving casters or legs may affect height of equipment. Specifications subject to change without notice.

