



QUEEN MARY Racks

Models: RA63-AS4 RA63-AS5 RA63-AS6 RA63-AS4-L RA63-AS5-L RA63-AS6-L

Design Features

- Durable, light weight extruded materials provide years of dependable service
- All shelves have center reinforcement angle
- Various models offering 54" or 65³/₄" width shelves are available
- Shelves provided with turned-down flange for added rigidity and strength
- Full perimeter bumper
- Two rigid casters coupled with two swivel casters allow for easy mobility of cumbersome loads
- Various models offer 8¹/₂", 11" and 15" spacing between shelves

Quality Construction

- All aluminum construction
- Maximum 2000 pound weight capacity
- .060 aluminum shelves with center angle reinforcement are welded to 1¹/₂" x 1¹/₂" extruded angle uprights
- Push-pull handle mounted at swivel caster end of rack
- Full perimeter bumper securely attached to base
- 8" polyurethane casters, two rigid (non-handle end), two swivel (handle end)



Options & Accessories

- Top corner bumpers
- Wheel brakes
- 8" balloon tire casters

Warranty & Certifications

Parts and Service Warranty

- Protected by BevLes 2 year parts and 1 year service warranty


Certified by the following:





QUEEN MARY Racks

Models: RA63-AS4 RA63-AS5 RA63-AS6 RA63-AS4-L RA63-AS5-L RA63-AS6-L

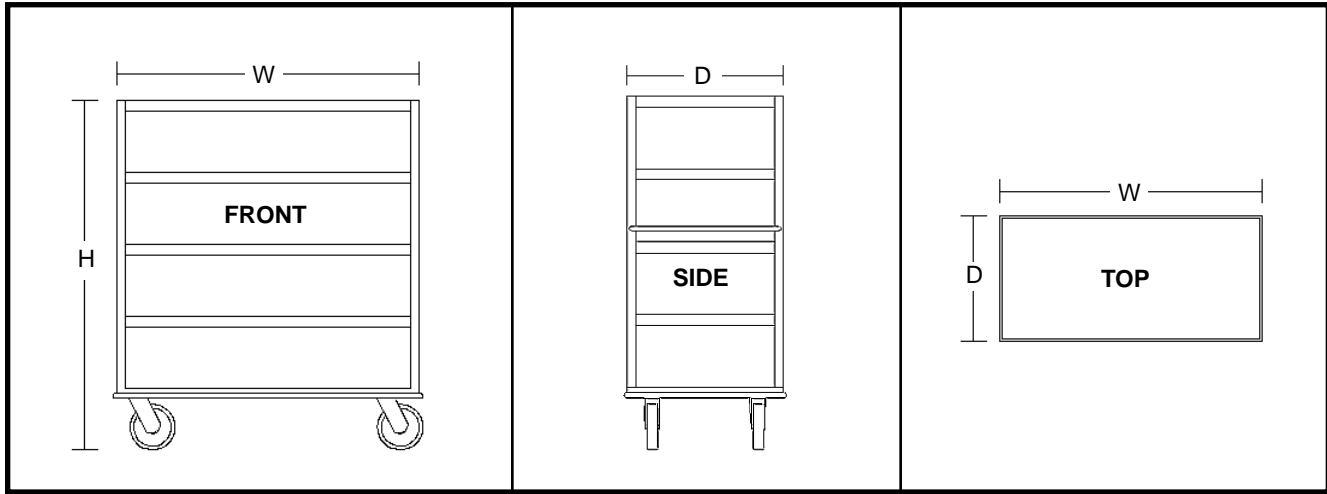

Model	Capacity		Dimensions			Ship Wt.	Act. Wt.
	Shelf	SPC'G	H	W	D		
RA63-AS4	4	15"	62½" (158.8 cm)	59½" (151.1 cm)	28½" (72.4 cm)	155 lbs (70.3 kg)	140 lbs (63.5 kg)
RA63-AS5	5	11"	62½" (158.8 cm)	59½" (151.1 cm)	28½" (72.4 cm)	165 lbs (74.8 kg)	150 lbs (68.0 kg)
RA63-AS6	6	8½"	62½" (158.8 cm)	59½" (151.1 cm)	28½" (72.4 cm)	175 lbs (79.4 kg)	160 lbs (72.6 kg)
RA63-AS4-L	4	15"	62½" (158.8 cm)	71" (180.3 cm)	28½" (72.4 cm)	189 lbs (85.7 kg)	174 lbs (78.9 kg)
RA63-AS5-L	5	11"	62½" (158.8 cm)	71" (180.3 cm)	28½" (72.4 cm)	200 lbs (90.7 kg)	185 lbs (83.9 kg)
RA63-AS6-L	6	8½"	62½" (158.8 cm)	71" (180.3 cm)	28½" (72.4 cm)	213 lbs (96.6 kg)	198 lbs (89.8 kg)

Construction

- .100 formed aluminum base*
- .060 formed aluminum shelves*
- 1½" x 1½" extruded angle uprights*
- 1" x 1½" extruded angle shelf support
- 1" round stainless steel handle
- Full perimeter bumper

* Base and shelves are heliarc welded to uprights to form a rigid frame

Casters

- Extra heavy-duty 8" x 2" wide polyurethane casters, two rigid at non-handle end, two swivel at handle end

Shipping

- Freight Class: 125
- FOB: Erie, PA 16511

* Note: Modifications involving casters or legs may affect height of equipment. Specifications subject to change without notice.

