



STACK -R- RACKS

Racks

Models: SRA69-AR20 SRA69-AR24

Design Features

- Unique design offers years of durable use with the ability to better utilize storage space by nesting empty racks
- Heavy-duty extruded angle supports double beaded for easy sliding of pans
- “X” top frame coupled with “Z” bottom frame allow racks to easily nest inside of each other
- Choose from 2½” or 3” spacing with capacities of 20 or 24 18” x 26” pans



Quality Construction

- All aluminum construction
- Top and bottom frames are 1” square tube heliarc welded to 1½” x 1½” extruded angle uprights
- Heavy-duty 1¾” wide extruded angle pan supports are riveted to rack uprights
- Heavy-duty plate-type casters with 4” neoprene wheels are bolted to rack

Options & Accessories

- Wheel brakes

Warranty & Certifications

Parts and Service Warranty

- Protected by BevLes 2 year parts and 1 year service warranty

Certified by the following:






STACK -R- RACKS

Racks

Models: SRA69-AR20 SRA69-AR24

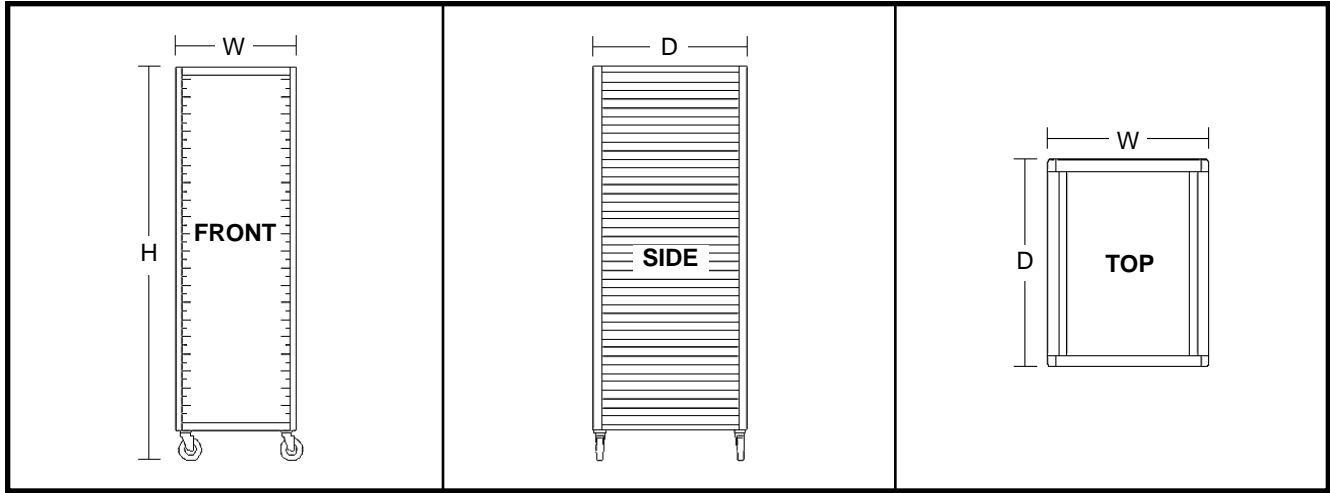

| Model | Capacity | | | Dimensions | | | Ship Wt. | Act. Wt. |
|------------|----------|-------|-------|-----------------|---------------|-------------|------------------|------------------|
| | 18x26 | 12x20 | SPC'G | H | W | D | | |
| SRA69-AR20 | 20 | --- | 3" | 69½" (176.5 cm) | 24" (54.6 cm) | 26" (66 cm) | 54 lbs (24.5 kg) | 39 lbs (17.7 kg) |
| SRA69-AR24 | 24 | --- | 2½" | 69½" (176.5 cm) | 24" (54.6 cm) | 26" (66 cm) | 55 lbs (24.9 kg) | 40 lbs (18.1 kg) |

Construction

- Bottom and top frames consist of durable 1" square tube welded to rack uprights
- Uprights are 1½" x 1½" extruded angle heliarc welded to top and bottom frames
- Caster mounting plates are attached to bottom frame and uprights

Pan Supports


- 1½" x 1¾" extruded aluminum angles riveted to rack uprights

Casters


- Heavy-duty plate-type casters, all swivel, with 5" neoprene wheels

Shipping


- Freight Class: 125
- FOB: Cheyenne, WY 82007

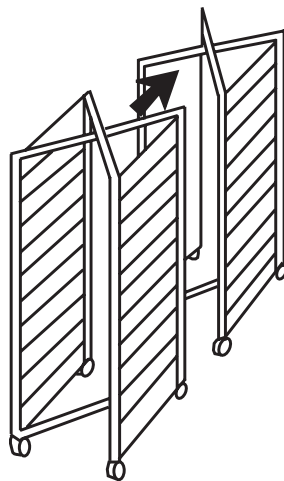

Space occupied by two empty Stack-R-Racks® nested together



Space occupied by two empty standard racks

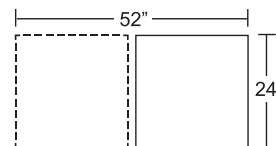

* Note: Modifications involving casters or legs may affect height of equipment. Specifications subject to change without notice.

