



Climate Select Humidity Holding Systems

Models: HCSS74W12 HCSS44W6

Design Features

- Temperature range 70° - 215°F
- Heating/Humidity system maintains proper combination of heat and humidity throughout cabinet
- Maintain heat and humidity levels by adjusting individual thermostats; regulate humidity levels by controlling air and water temperatures. System allows for humidity level to 95%.
- Drip trough channels water to a removable water pan and eliminates recycling of contaminants and debris back into the humidity system
- Side air tunnel system circulates air evenly throughout cabinet with minimal heat and humidity loss when doors are opened
- Solid State controls provide the highest degree of accuracy and reliability
- Four gallon water reservoir with low level water warning light and an easily accessible water drain
- Radiused interior corners

Quality Construction

- Stainless steel construction
- .190 aluminum welded base
- Heavy-duty plate type casters with 5" hard rubber wheels; front two with brakes
- High quality field reversible Dutch doors with self-closing lift off hinges, magnetic latches with "cool-to-touch" handle and turn knob lock
- Magnetic door gaskets
- Recessed stainless steel side mounted (front and rear) pull grips for easy mobility



Options & Accessories

- Left-hand door hinging
- Full perimeter bumper
- Corner bumpers
- Doors with tempered glass windows
- Pass-through design
- Additional stainless steel pan supports
- Stainless steel cord wrap
- 208V or 240V models
- Key lock latch
- 5" polyurethane casters

Warranty & Certifications

Parts and Service Warranty

- Protected by BevLes 2 year parts and 1 year service warranty

Certified by the following (pending):




Mailing: 729 Third Ave., Dallas, TX 75226 • Shipping: 1938 Wyott Dr., Cheyenne, WY 82007
(800) 441-1601 • Fax: (214) 565-0976 • www.bevles.com • sales@bevles.com



Item No. _____
 Approval: _____
 Date: _____

Climate Select Humidity Holding Systems

Models: HCSS74W12 HCSS44W6

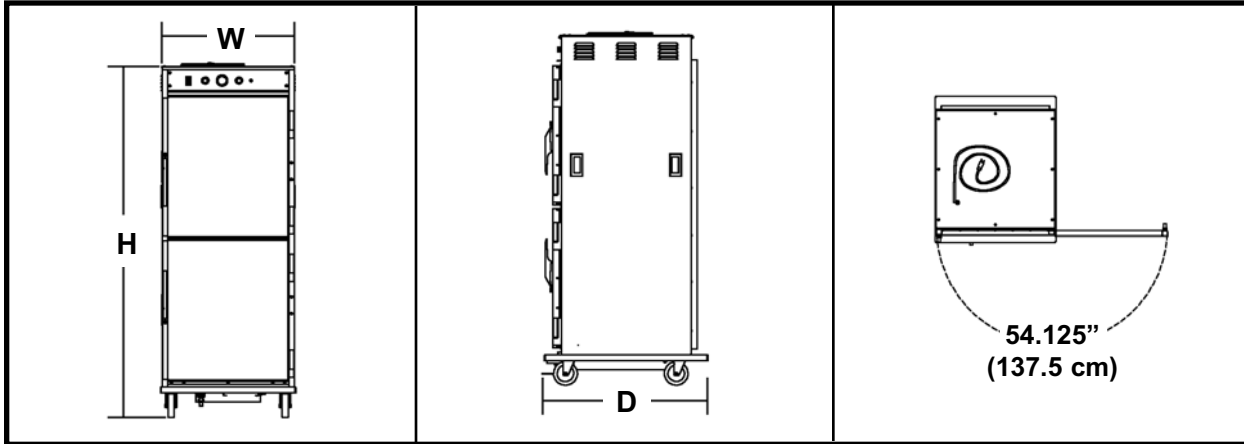

Model	Capacity			Dimensions			Ship Wt.	Act. Wt.
	18x26	12x20	SPC'G*	H	W	D		
HCSS74W12	12	24	4.5"	73.63" (187 cm)	28.13" (71.4 cm)	34" (86.4 cm)	350 lbs (158.8 kg)	325 lbs (147.4 kg)
HCSS44W6	6	12	4.5"	43.6" (110.8 cm)	28.13" (71.4 cm)	34" (86.4 cm)	235 lbs (106.6 kg)	210 lbs (95.2 kg)

Electrical	Voltage	Watts	Amps	Electric Service	Phase	Hertz	Clearances
Standard	120	2024	16.9	20A Dedicated Circuit	1	50/60	Sides, Back, & Top = 0"
Optional	208	2854	13.7	20A Dedicated Circuit	1	50/60	Sides, Back, & Top = 0"
Optional	240	3790	15.8	20A Dedicated Circuit	1	50/60	Sides, Back, & Top = 0"

*Pan supports are adjustable on 1.5" spacing

Construction

- **Exterior Body:** 20 ga. 304-#3 stainless steel
- **Interior Body:** 20 ga. 304-2B stainless steel
- **Exterior Door:** Formed 20 ga. 304-#3 stainless steel
- **Interior Door:** 22 ga. bright annealed stainless steel
- **Door Configuration:** Dutch doors - right hand hinged standard. (field reversible)
- **Reinforcement:** Internal framework of 18 ga. 201 stainless steel
- **Latches:** Heavy-duty magnetic latch with "cool-to-touch" handle with turn knob lock
- **Hinges:** Heavy-duty, lift off, self-closing
- **Base:** One-piece construction, .190 aluminum, welded
- **Casters:** 5" hard rubber wheels, swivel type, front two equipped with brakes.
- **Side Pull Handles:** Recessed stainless steel handles mounted with hardware
- **Door Gaskets:** Magnetic, NSF approved Santoprene
- **Insulation:** Fully insulated back, sides, base, top and door with 1.5" fiberglass

Pan Support Assembly

- **Side (Air Duct) Panels:** 20 ga. 304-2B stainless steel
- **Pan Supports:** Stainless steel, universal rod-style

Power Requirements

- 2024W at 120V, 2854W at 208V, 3790W at 240V, 50/60Hz, single phase, 20 Amp service
- **Power Cord:** 120V has permanent 8 ft. 12/3 ga. with molded (NEMA 5-20P) plug - 208V and 240V models provided with cord only

Heating Module & Controls

- Easy to operate, user-friendly solid state controls
- **Temperature Control:** Temperature range 70° - 215°F
- **Humidity Control:** Controlled humidity range 10% - 95%RH
- **Low Water Alarm:** Visual signal alerts operator of low water condition
- **Water Reservoir:** 4 gallon (15 liter) capacity
- **Drip Trough:** Drains into standard 1/6 x 2.5" pan located under base

Shipping

- Freight Class: 85
- FOB: Cheyenne, WY 82007

* Note: Modifications involving casters or legs may affect height of equipment. Specifications subject to change without notice.



Mailing: 729 Third Ave., Dallas, TX 75226 • Shipping: 1938 Wyatt Dr., Cheyenne, WY 82007
 (800) 441-1601 • Fax: (214) 565-0976 • www.bevles.com • sales@bevles.com

5/5/06
#B108