



# Temper Select Heated Holding Systems

Models:  HTSS74P34  HTSS44P16  HTSS74W12  HTSS44W6

## Design Features

- Temperature range of 70° - 215°F for heating and holding a variety of foods.
- Top mounted convection heat and humidity system maintains even cabinet temperatures and ensures quick pre-heating and rapid recovery.
- Fully insulated cabinet prevents heat loss and keeps foods hot and ready to serve. Side air tunnel system circulates air evenly throughout the cabinet with minimal temperature loss when the doors are opened.
- Solid state controls provide the highest degree of accuracy and reliability. Prepared foods are held at consistent serving temperatures.
- Easy-to-clean radiused interior corners prevent food/grease buildup.
- Removable top water pan provides additional humidity for hard to hold items.

## Quality Construction

- Stainless steel construction provides years of dependable use
- .190 aluminum welded base
- Heavy duty plate type casters with 5" hard rubber wheels; front two with brakes
- Heavy duty field reversible Dutch doors with self-closing lift off hinges and magnetic latches with "cool-to-touch" handle and turn knob lock
- Magnetic door gaskets
- Recessed stainless steel side-mounted (front and rear) pull grips provide easy mobility and prevent damage to walls



## Options & Accessories

- Left-hand door hinging
- Full perimeter bumper
- Corner bumpers
- Pass-through design
- Doors with tempered glass windows
- Stainless steel cord wrap
- 208V or 240V models
- Key lock latch
- Solid state controls w/ digital temperature display
- Transport handles
- 5" polyurethane casters

## Warranty & Certifications

### Parts and Service Warranty

- Protected by BevLes 2 year parts and 1 year service warranty

Certified by the following:




Mailing: 729 Third Ave., Dallas, TX 75226 • Shipping: 1938 Wyott Dr., Cheyenne, WY 82007  
(800) 441-1601 • Fax: (214) 565-0976 • www.bevles.com • sales@bevles.com



Item No. \_\_\_\_\_  
 Approval: \_\_\_\_\_  
 Date: \_\_\_\_\_

# Temper Select Heated Holding Systems

Models:  HTSS74P34  HTSS44P16  HTSS74W12  HTSS44W6

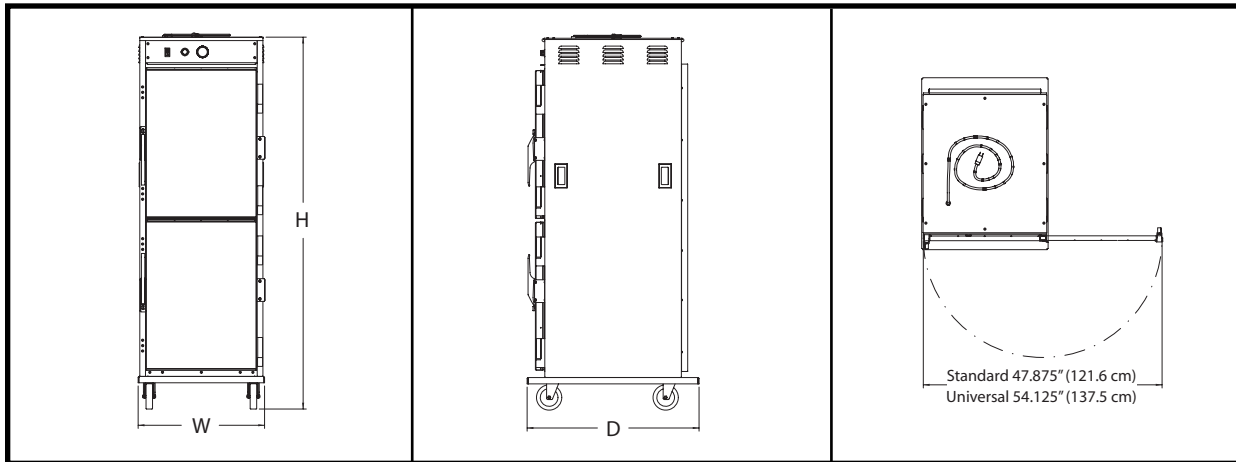

Model	Capacity			Dimensions			Ship Wt.	Act. Wt.
	18x26	12x20	SPC'G*	H	W	D		
<b>Standard Width</b>								
HTSS74P34	34	--	1.5"	73.63" (187 cm)	25" (63.5 cm)	34" (86.4 cm)	302 lbs (137 kg)	277 lbs (125.7 kg)
HTSS44P16	16	--	1.5"	43.6" (110.8 cm)	25" (63.5 cm)	34" (86.4 cm)	201 lbs (91.2 kg)	176 lbs (79.8 kg)
<b>Universal Width</b>								
HTSS74W12	12	24	4.5"	73.63" (187 cm)	28.1" (71.4 cm)	34" (86.4 cm)	345 lbs (156.5 kg)	320 lbs (145 kg)
HTSS44W6	6	12	4.5"	43.6" (110.8 cm)	28.1" (71.4 cm)	34" (86.4 cm)	229 lbs (103.9 kg)	204 lbs (92.5 kg)

\*Pan supports are adjustable on 1.5" spacing

Electrical	Voltage	Watts	Amps	Electric Service	Phase	Hertz	Clearances
Standard	120	1274	10.6	15A Dedicated Circuit	1	50/60	Sides, Back, & Top = 0"
Standard HW	120	1824	15.2	20A Dedicated Circuit	1	50/60	Sides, Back, & Top = 0"
Optional	208	1581	7.8	15A Dedicated Circuit	1	50/60	Sides, Back, & Top = 0"
Optional	240	2092	8.7	15A Dedicated Circuit	1	50/60	Sides, Back, & Top = 0"

## Construction

- Exterior Body: 20 ga., 304-#3 stainless steel
- Interior Body: 20 ga., 304-2B stainless steel
- Exterior Door: Formed 20 ga. 304-#3 stainless steel
- Interior Door: 22 ga., 430 bright annealed stainless steel
- Door Configuration: Dutch doors (right hand hinged standard) (field reversible)
- Reinforcement: Internal framework of 18 ga. 201 stainless steel
- Latches: Heavy-duty magnetic latch with "cool-to-touch" handle and turn knob lock
- Hinges: Heavy-duty, lift off, self-closing
- Base: One-piece construction, .190 aluminum, welded
- Casters: 5" hard rubber wheels, swivel type, front two equipped with brakes.
- Side-pull grips: Recessed stainless steel pull grips mounted with hardware
- Door gaskets: Magnetic, NSF approved Santoprene
- Insulation: Fully insulated back, sides, base, top and doors with 1.5" fiberglass insulation

## Pan Support Assembly

- Side (Air Duct) Panels: 20 ga. 304-2B stainless steel
- Pan Supports Standard: Channel style
- Pan Supports Universal: Chrome plated rod style

## Power Requirements

- 1274W at 120V, 50/60Hz, single phase, 15 amp service
- 1824W at 120V, 50-60Hz, single phase, 20 amp service
- Power Cord: Permanent 8 ft. 12/3 ga. with molded (NEMA 5-15P) plug, or (NEMA 5-20P). 208V or 240V models provided with cord only

## Heating Module & Controls

- Easy to operate, user-friendly solid state controls
- Lighted Power Switch: Indicates when unit is operating
- Temperature Control: Temperature range 70° - 215°F

## Shipping

- Freight Class: 85
- FOB: Cheyenne, WY 82007

\* Note: Modifications involving casters or legs may affect height of equipment. Specifications subject to change without notice.



Mailing: 729 Third Ave., Dallas, TX 75226 • Shipping: 1938 Wyatt Dr., Cheyenne, WY 82007  
 (800) 441-1601 • Fax: (214) 565-0976 • www.bevles.com • sales@bevles.com

5/8/06  
#B109